
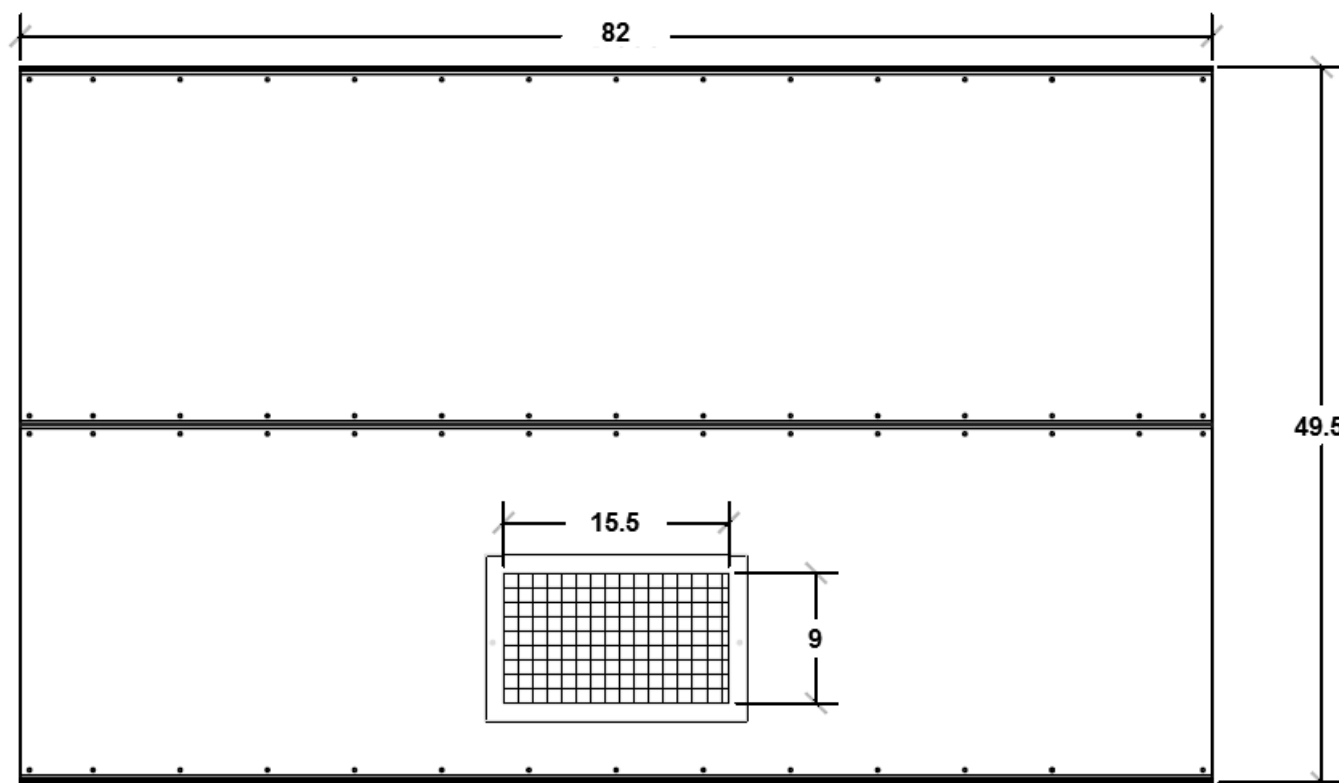


SPECIFICATIONS:

- DIMENSIONS: 49.50 H X 82 W X 24.5 D
- MOTOR: 5 HP 208-230/460/3/60, 14.0-12.6/6.3 FLA
- CFM: 1200 RPM - 6,500 @ .8" W.G.
1300 RPM - 7,250 CFM @ 1.0" W.G.
- CONSTRUCTION 12 & 14 GA POWDER COATED STEEL FRAME.
3/16 POLYETHYLENE PANELS. FULL CARBON STEEL CONSTRUCTION AVAILABLE.
4-WAY ALUMINUM EXHAUST GRILLE
- ELECTRICAL WIRED TO JCT. BOX
14.0-12.6/6.3 AMPS
- BLOWER: 12 X 12 FORWARD CURVED BLOWER
BELT DRIVE
- FILTERS: 4" PLEATED PREFILTER, 22.3 SF EA.
95% BAG FILTER, 81.25 SF EA.
65% BAG FILTER(OPT.), 81.25 SF EA
2" CARBON TRAY (OPT.)
- OPTIONS: EYEBOLTS (INSTALLED)
SILENCER
MAGNAHELIC GAUGE
- WEIGHT: 6000 - 345 LBS.

NOTE:
Available in 575V
and will run at
1.0 Amp per HP

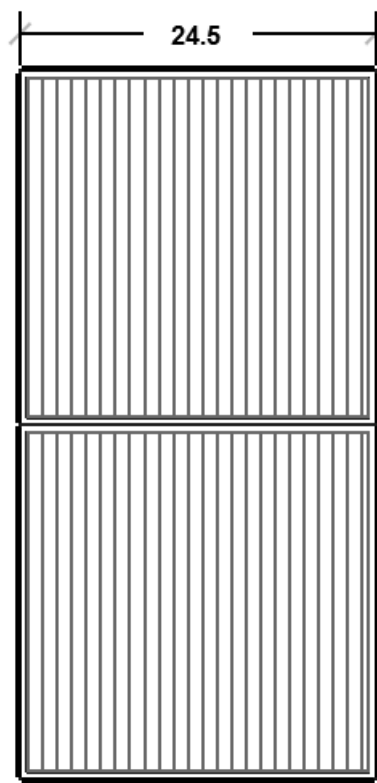

09-04

CUSTOMER:
CUSTOMER P.O.:
PROJECT:
ENGINEER:
SALES REP.:
IDENTIFICATION / TAGGING:

> www.lev-co.com • 1.888.862.5356



The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by: JANOS-B
Date: 5/8/2008
Scale: NTS
Weight: N/A

**09-04 T6000
AIRCLEANER**

Specification Drawing



Drawing No.: - File Name: (09-04) T6000 - SD
Material: - Sheet: 1/2

MODELS & OPTIONS

Part #

Description

Main System / Part

T6000

Industrial Air Cleaner - 6000 CFM

- Collects dust, smoke and other airborne pollutants in factories, schools, shops, labs, assembly areas and repair shops with a high a high efficiency, 2-stage filtration system.
 -Is a complete, packaged air filter unit designed as a "free hanging" system for efficient and economical air cleaning when at-the-source capture of polutants is not possible or practical. Strategic placement of one or several units in an area will result in dramatic reduction of the bothersome smoke, dust or haze in your facility. The first stage of filtration is a 40% pleated pre-filter that will trap dust and larger particles. The second stage is a micro-glas multi-pocket bag filter that will remove smoke and other sub-micron size particles from the air.

Misc. Options

60Module

Adds additional frame, poly cabinet, & filters (specify arrangement)

Steel 6000

List price adder for all steel 2 module unit

60Silencer-ST

Acoustically lined steel exhaust outlet w/4-way aluminum grille

60Silencer-PE

Acoustically lined poly exhaust outlet w/4-way aluminum grille

Magnahelic

0-5" surface mount Magnahelic gauge

Steel 7500

List price adder for all steel 4 module unit

65% Bag6075

65% bag filter in lieu of 95%, (X's 2 for 7500)

Minihelic

0-5" flushmount Minihelic gauge

EB Stacked6075

Eyebolt mounting kit for stacked units(factory installed, includes channel & rod)

CM266075

Adds (4) 26 lb. carbon V-banks in lieu of 95% bags (x'2 forT7500)

CM50/506075

26 lb. 50/50 carbon/KMNO4 blend V-bank in lieu of 95% bags (x'2 for T7500)

FLTRSVR6075

Filter saver option - adds 2" poly pad and hangers, (x's 2 for T7500)

09-04

CUSTOMER:
 CUSTOMER P.O.:
 PROJECT:
 ENGINEER:
 SALES REP.:
 IDENTIFICATION / TAGGING:

> www.lev-co.com • 1.888.862.5356


lev-co

The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by: JANOS-B
 Date: 5/8/2008
 Scale: NTS
 Weight: N/A

**09-04 T6000
 AIRCLEANER**

Specification Drawing



Drawing No.: -
 Material: -
 File Name: (09-04) T6000 - SD
 Sheet: 2/2