


16-01 GPH MASTER SANTO-L



- Properties:**
- good tear resistance
 - improved puncture resistance
 - outstanding flex fatigue resistance
 - good chemical resistance to alkalis, acids and solvent gases
 - gas-tight
 - free of plastiziers
 - free of halogen
 - lightweight
 - extremely flexible
 - smooth inside, for optimum flow characteristics
 - small bend radius
 - electrically conductive by grounding spiral

Construction

- ① coated spring steel spiral
- ② hose wall: santoprene coated polyester fabric
- ③ wall thickness between spirals: 0.0197"

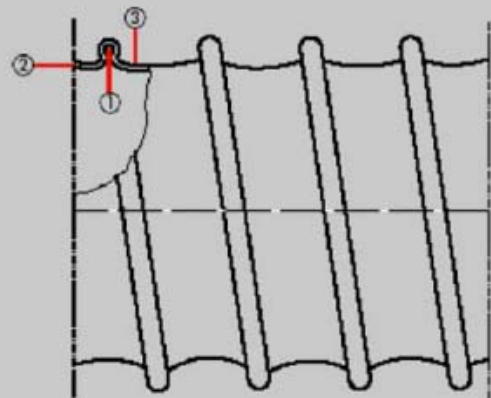

Temperature Range

- -60 °F up to +275 °F
- intermittent to +300 °F