


## 16-02 OM-AB-260 Urethane Hose - Oil Mists and Abrasive dusts

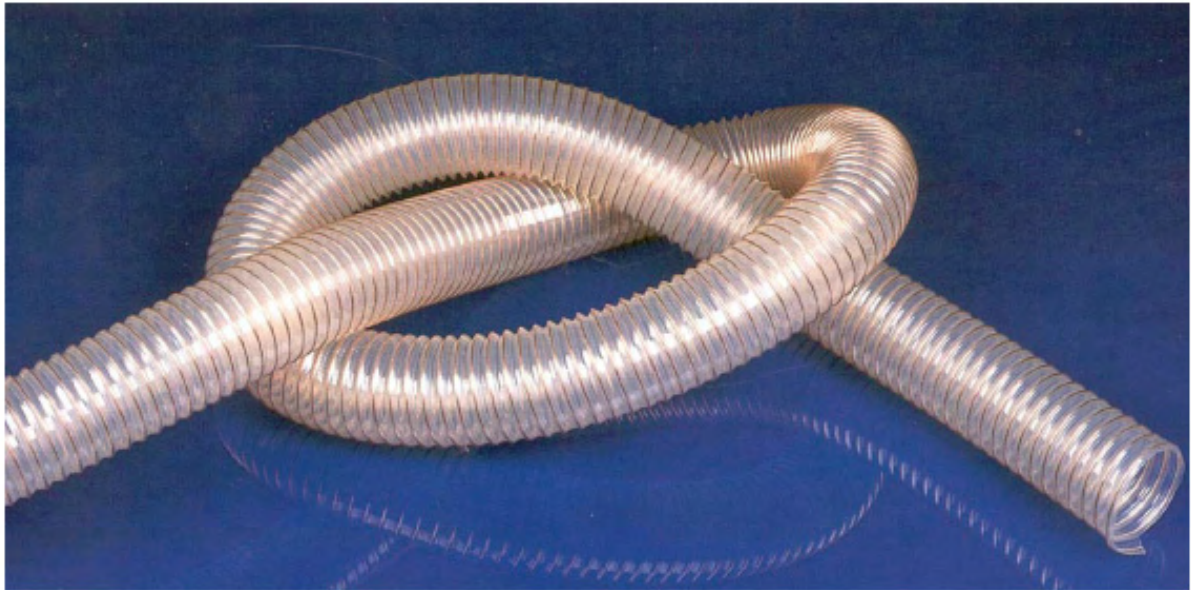


### Properties

- Reinforced by spring steel spiral
- Extremely flexible
- Small bend radius
- High tensile and burst strength
- Super lightweight
- High abrasion-resistant
- Kink-proof
- Compressible down to 20%
- Solvents, oil and fuels-resistant
- Gas-tight
- Free of plasticizers and halogens
- UV- and ozone-resistant
- Smooth inside, for optimum flow characteristics
- Electrically conductive by grounding spiral

### Construction

- ① PU-coated spring steel spiral
- ② hose wall: polyester polyurethane
- ③ wall thickness between spirals .02"

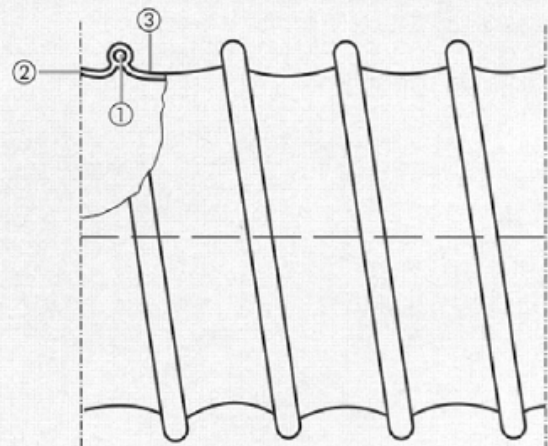

### Temperature Range

- -40°F up to +195°F
- intermittent to +260°F