


16-03 LT-300 Vehicle Exhaust Hose - Vehicle Emissions (300°F)

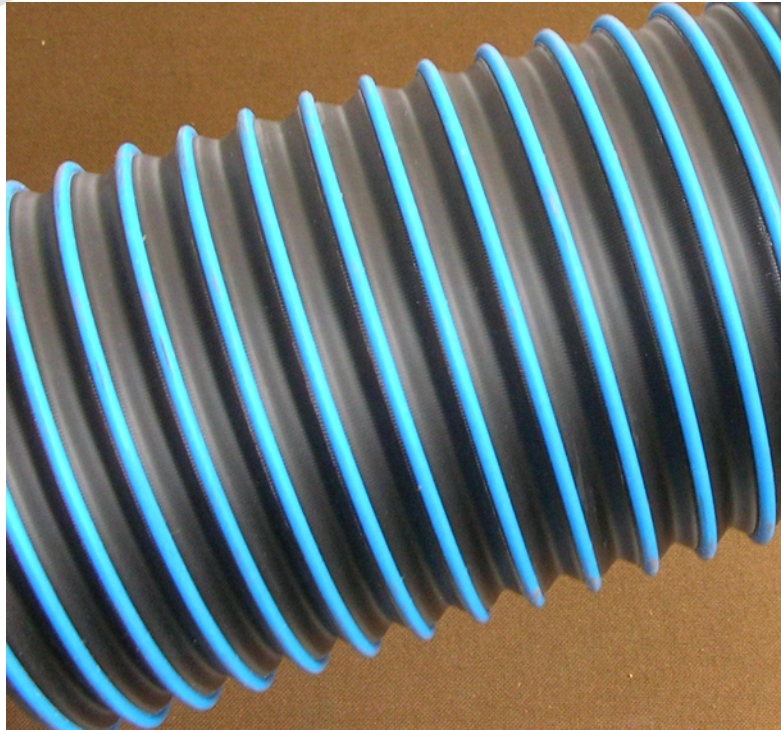


Properties:

- good tear resistance
- improved puncture resistance
- outstanding flex fatigue resistance
- good chemical resistance to alkalis, acids and solvent gases
- gas-tight
- free of plastizers
- free of halogen
- lightweight
- extremely flexible
- smooth inside, for optimum flow characteristics
- small bend radius
- electrically conductive by grounding spiral

Construction

- ① coated spring steel spiral
- ② hose wall: santoprene coated polyester fabric
- ③ wall thickness between spirals 0.0197"

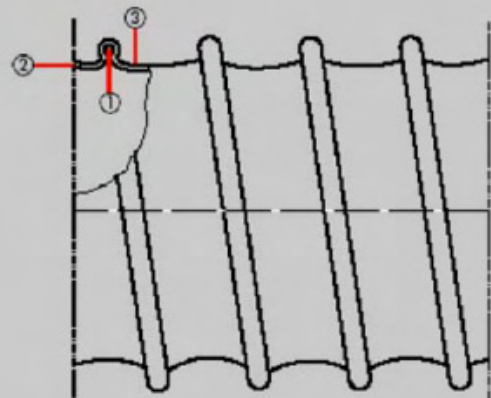

Temperature Range

- -60 °F up to +275 °F
- intermittent to +300 °F