
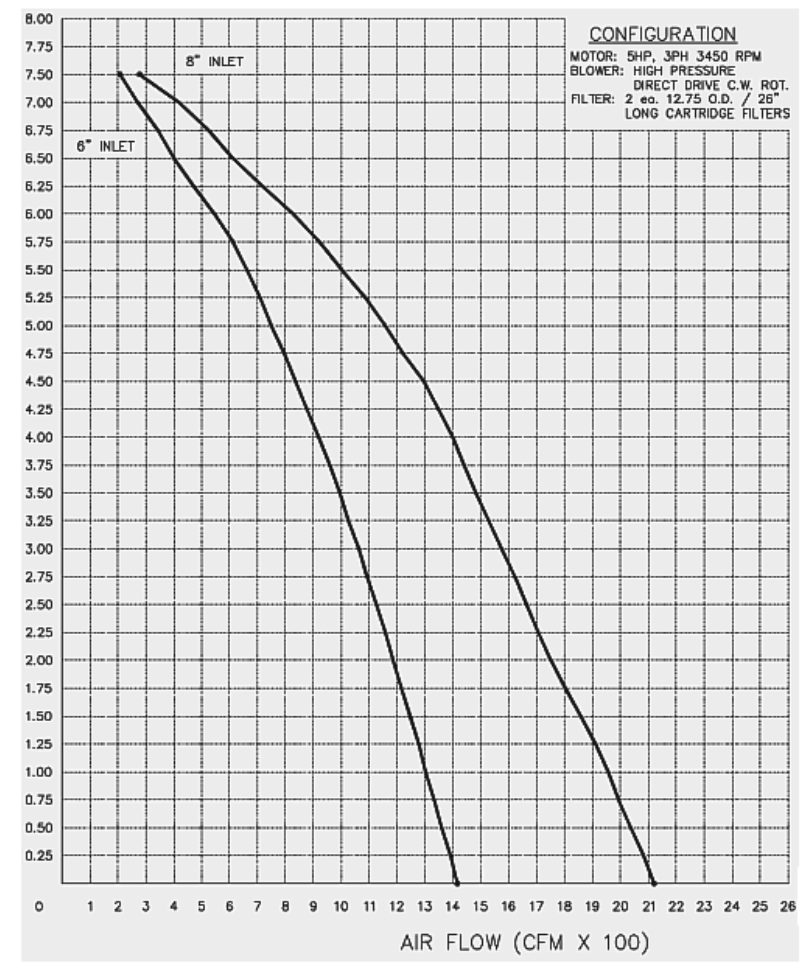


LEV-RP-2 PERFORMANCE CURVES

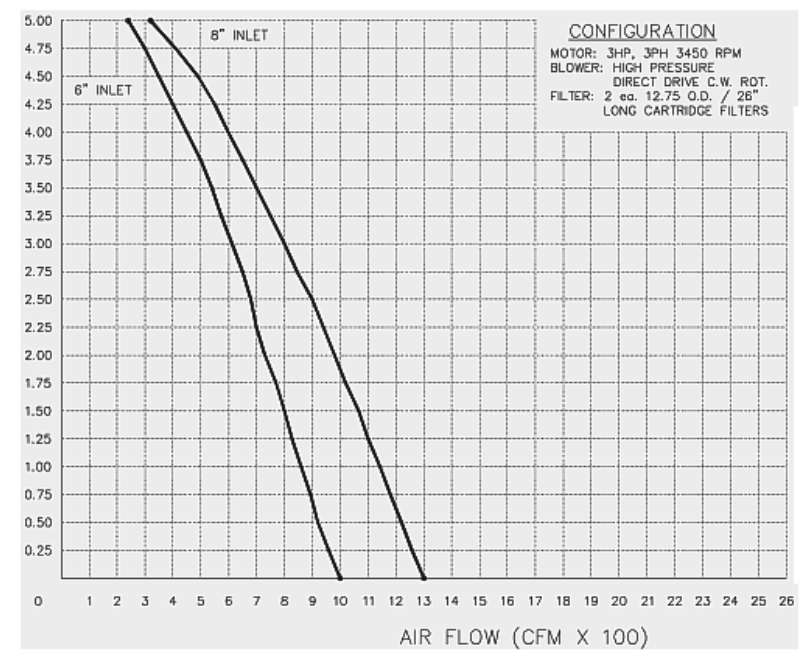

- NOTES:
1. 120V PHOTOHELIC.
 2. OPTIONAL - 120V ROTARY AIRLOCK.
 3. OPTIONAL - BLASTGATE ON HOPPER.
 4. NO MOTOR STARTER/OVERLOAD FOR USE WITH CUSTOMER SUPPLIED VFD.
 5. LEFT OR RIGHT SIDE EXPLOSION VENT.
 6. 8" TOP INLET
 7. SAP FAN PACKAGE.

CUSTOMER:
CUSTOMER P.O.:
PROJECT:
ENGINEER:
SALES REP.:
IDENTIFICATION / TAGGING:

> www.lev-co.com • 1.888.862.5356



The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by:	Janos B
Date:	5/24/2010
Scale:	NTS
Weight:	N/A

LEV-RP-2	
Specification Drawing	
Drawing No.:	-
Material:	-
File Name:	PR-2_SD
Sheet:	1/1