


VE Single Extractor w/rope and pulley kit

The system consists of:

1. 6m (20 ft.) Silicon Fiberglass 2-ply flexible hose suitable for temperatures of up to 600° F - shipped in a 6m (20 ft.) length
2. VE 90° saddle c/w "D" ring
3. PK-50: Rope& pulley kit
4. Hose Clamps (Typ of 4)

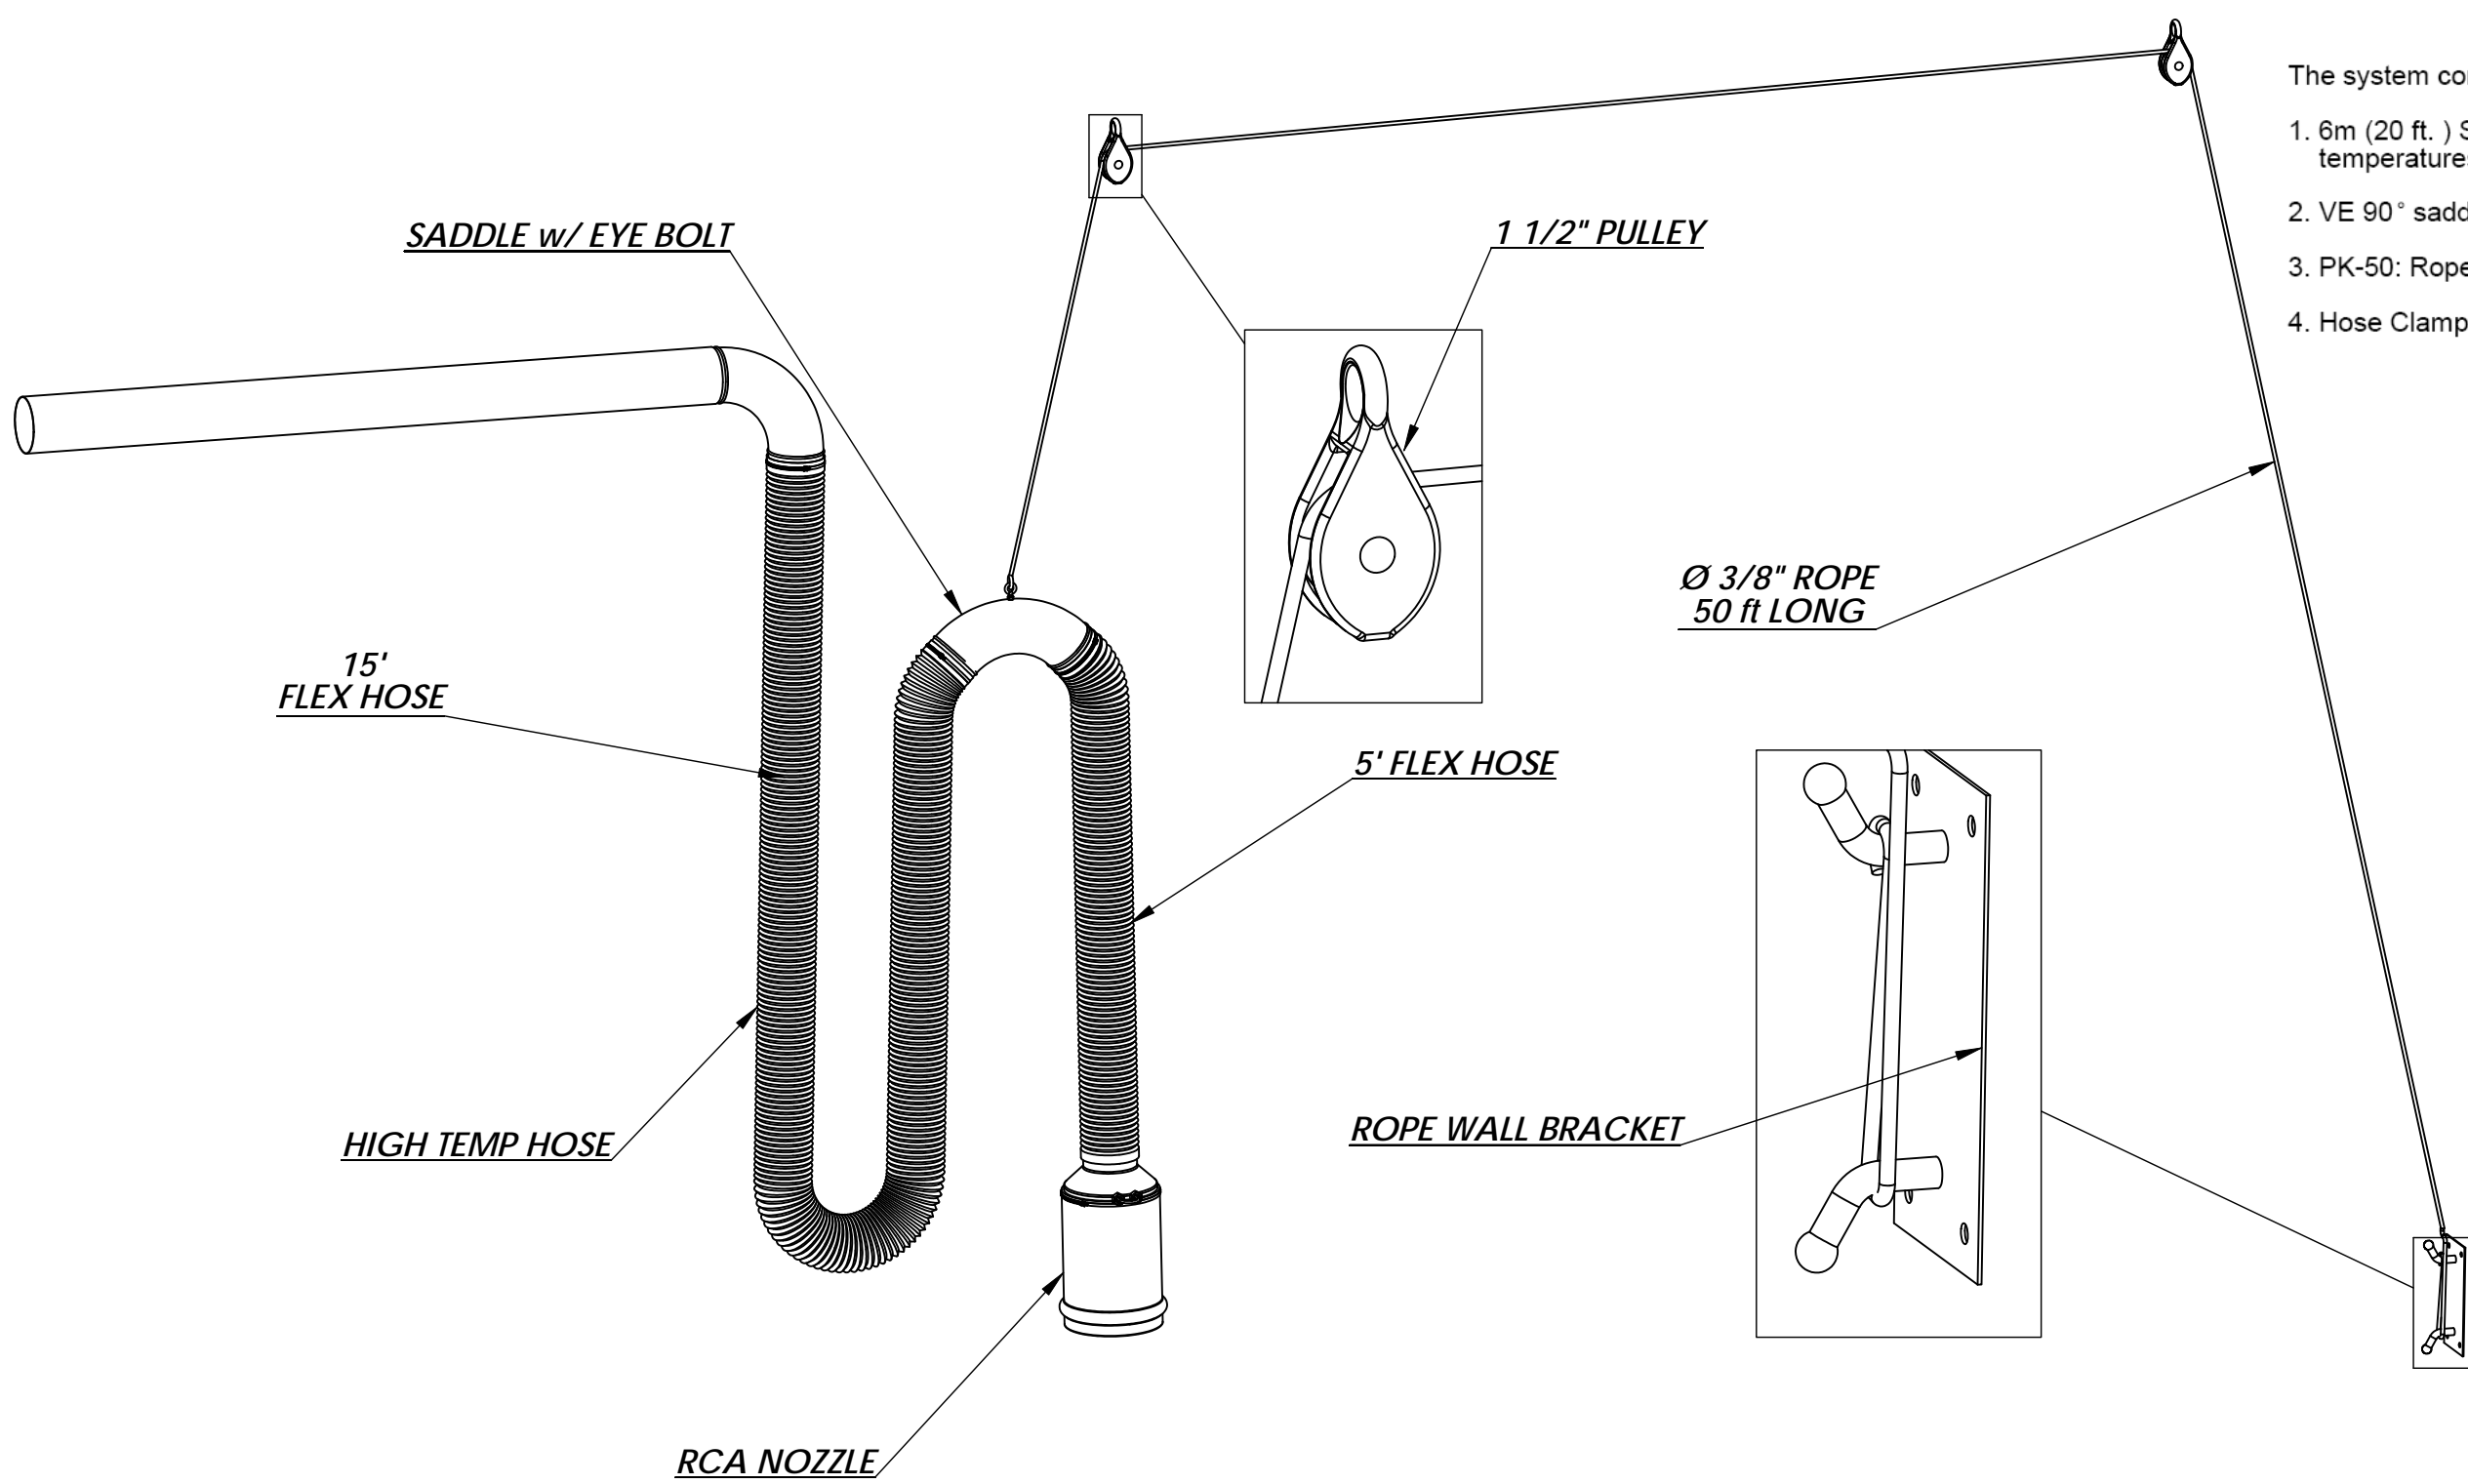

14-02

CUSTOMER:
CUSTOMER P.O.:
PROJECT:
ENGINEER:
SALES REP.:
IDENTIFICATION / TAGGING:

> www.lev-co.com • 1.888.862.5356



The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by:	JANOS B
Date:	5/20/2008
Scale:	NTS
Weight:	N/A

14-02 VE Single Extractor with Pulley Kit
Specification Drawing

Drawing No.:	-	File Name:	(14-02) VE Single Extractor w/ Pulley Kit
Material:	-	Sheet:	1/2

MODELS & OPTIONS:

Part #	Description
Low Temp Hose Drop	
<input type="checkbox"/> SER-4-LT	4" VE single exhaust extractor c/w 6m (20 ft.) 250° F hose, saddle, rope and pulley kit.
<input type="checkbox"/> SER-5-LT	5" VE single exhaust extractor c/w 6m (20 ft.) 250° F hose, saddle, rope and pulley kit.
<input type="checkbox"/> SER-6-LT	6" VE single exhaust extractor c/w 6m (20 ft.) 250° F hose, saddle, rope and pulley kit.
<input type="checkbox"/> SER-8-LT	4" VE single exhaust extractor c/w 6m (20 ft.) 250° F hose, saddle, rope and pulley kit.
High Temp Hose Drop	
<input type="checkbox"/> SER-4-HT	4" VE single exhaust extractor c/w 6m (20 ft.) 600° F hose, saddle, rope and pulley kit.
<input type="checkbox"/> SER-5-HT	5" VE single exhaust extractor c/w 6m (20 ft.) 600° F hose, saddle, rope and pulley kit.
<input type="checkbox"/> SER-6-HT	6" VE single exhaust extractor c/w 6m (20 ft.) 600° F hose, saddle, rope and pulley kit.
<input type="checkbox"/> SER-8-HT	8" VE single exhaust extractor c/w 6m (20 ft.) 600° F hose, saddle, rope and pulley kit.
Rubber Tailpipe Adapters c/w Vice Grip (Suitable for Round or Oval Tailpipes)	
<input type="checkbox"/> SRF-4/D	4" Rubber nozzle with vice grip and automatic damper - 6" opening
<input type="checkbox"/> SRF-5/D	5" Rubber nozzle with vice grip and automatic damper - 8" opening
<input type="checkbox"/> SRF-6/D	6" Rubber nozzle with vice grip and automatic damper - 8" opening
<input type="checkbox"/> SRF-4	4" Rubber nozzle with vice grip - 6" opening
<input type="checkbox"/> SRF-5	5" Rubber nozzle with vice grip - 8" opening
<input type="checkbox"/> SRF-6	6" Rubber nozzle with vice grip - 8" opening
Over-head Stack adapter - High Temperature Rubber	
<input type="checkbox"/> RCA-5	5" Diesel Stack Adapter - 10" opening for exhaust pipe
<input type="checkbox"/> RCA-6	6" Diesel Stack Adapter - 10" opening for exhaust pipe
<input type="checkbox"/> RCA-8	8" Diesel Stack Adapter - 10" opening for exhaust pipe
Hose, Hood & Nozzle Options	
<input type="checkbox"/> TP-6-12	6' - 12' Telescoping Pole
<input type="checkbox"/> P-230	Hose holder for mounting on OM-092 Fan Mounting Bracket or directly to a wall. For max 150mm hose.
Fans - Single Station and/or Direct Mount (Motor Starter not included)	
<input type="checkbox"/> P-147	P-Max direct drive fan 0.5 HP 115V/1/60 .
<input type="checkbox"/> P-149-1	P-Max© direct drive fan 1 HP 115/1/60
<input type="checkbox"/> P-152-1	P-Max© direct drive fan 1.5 HP 115/230/1/60
Hose Clamps - Bridge Type (Necessary to go over the helix of the hose)	
<input type="checkbox"/> MD-530-100-100	4" Ø Bridge Clamp. Clamping range of 100mm-120mm
<input type="checkbox"/> MD-530-125-100	5" Ø Bridge Clamp. Clamping range of 120mm-140mm
<input type="checkbox"/> MD-530-150-100	6" Ø Bridge Clamp. Clamping range of 150mm-170mm
<input type="checkbox"/> MD-530-200-100	8" Ø Bridge Clamp. Clamping range of 200mm-220mm
Fan Control Panels (when ordering main unit)	
<input type="checkbox"/> P-024-1	115V/1/60 Fan Motor control station. Permits manual start-stop of the fan. Comes complete with motor overload protection on/off control power cord and plug. Overload rating according to the FLA of the motor. Field installation required.
Fan Mounting Brackets	
<input type="checkbox"/> OM-092	P-Max Fan/Duct mounting bracket for 2 x 150mm (6")Ø Hoses c/w 150/160 mm (6"/6.33") hose/duct connection. Package contains: Plastic cover (Block end) in cases where only one hose is used 2 - 5" Ø reducers for connections to 5" Ø hoses 2 - 4" Ø reducers for connections to 4" Ø hoses

CUSTOMER:
CUSTOMER P.O.:
PROJECT:
ENGINEER:
SALES REP.:
IDENTIFICATION / TAGGING:


> www.lev-co.com • 1.888.862.5356

lev-co

The device depicted and described hereon embodies proprietary information owned by the manufacturer. All design, manufacturing, reproduction, sales and patent rights regarding this device or drawing reserved except where explicit right is guaranteed in writing. We reserve the right to make design changes.

Drawn by:	JANOS B
Date:	5/20/2008
Scale:	NTS
Weight:	N/A

14-02 VE Single Extractor with Pulley Kit
Specification Drawing



Drawing No.:	-	File Name:	(14-02) VE Single Extractor w. Pulley Kit
Material:	-	Sheet:	2/2